

8

7

6

5

4

3



2

1

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ANDERSON POWER PRODUCTS. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF ANDERSON POWER PRODUCTS IS PROHIBITED.

Copyright 2015

ANDERSON POWER PRODUCTS RESERVES THE RIGHT TO ALTER PRODUCT TYPES, THEIR TECHNICAL DATA, DIMENSION, STYLE AND ACCESSORIES WITHOUT PRIOR NOTIFICATION.

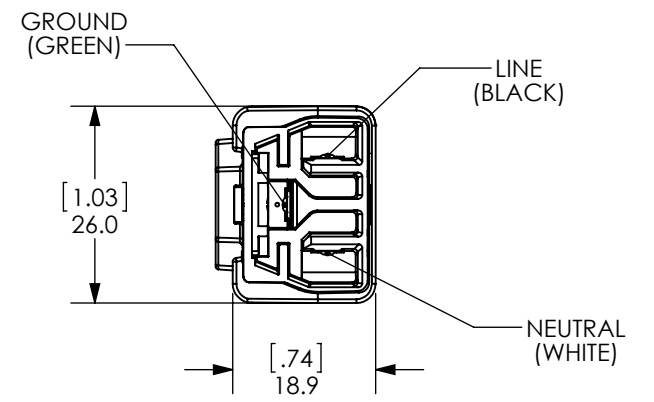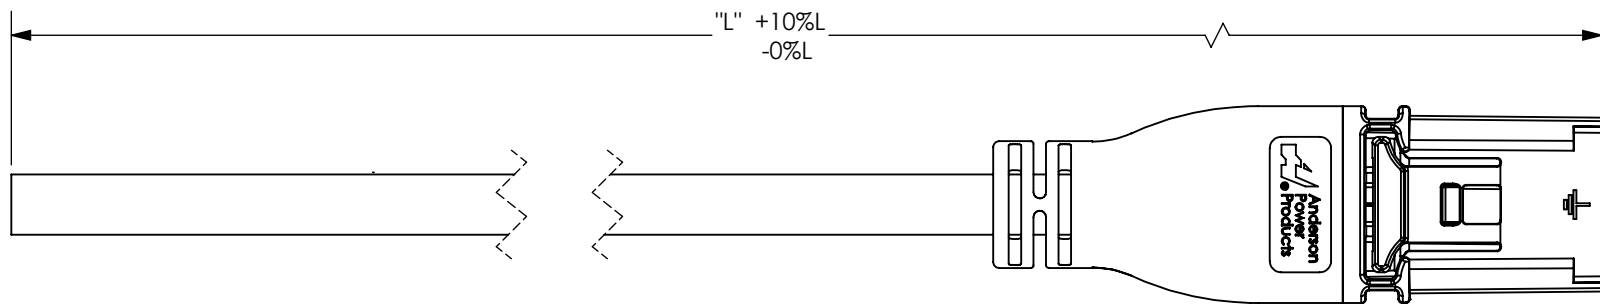

| CONNECTOR | | CABLE | |
|--------------------|----------------------------------|-----------------------|-----------------------------|
| TYPE | SAF-D-GRID® 300 VOLT (3-6075P10) | TYPE | UL 62 LISTED SJT TYPE |
| KEY CONFIGURATION | KEY "A"(SEE NOTE 1) | CONDUCTOR SIZE / QTY. | 18 / 3 |
| APPROVAL | cURus TO UL 1977, FILE# E26226 | STRANDING | 16 X 30AWG |
| CONTACTS | COPPER ALLOY, SILVER PLATED | FLAMMABILITY / TEMP. | VW-1 / 90°C |
| INNER MOLD HOUSING | POLYCARBONATE, GRAY. UL 94 V-0 | VOLTAGE RATING | 300V AC/DC |
| OVERMOLD | PVC, BLACK. UL 94 V-2 | JACKET | PVC, NOMINAL O.D. 8.0 [.32] |
| | | JACKET COLOR | BLACK |

| OVERALL RATINGS AND SPECIFICATIONS | |
|------------------------------------|-------------------------------------|
| VOLTAGE | 300V AC/DC |
| CURRENT | 10A |
| MAXIMUM OPERATING TEMPERATURE | 80°C |
| CERTIFICATION | INSPECTION |
| cURus TO UL 817, FILE # E343569 | HI POT WIRE TO WIRE 2.5 kV / 3 SEC. |
| REACH COMPLIANT | POLARITY TESTED 100% |
| RoHS COMPLIANT | CONTINUITY TESTED 100% |
| | ELECTRICAL TESTING 100% |
| | VISUAL INSPECTION 100% |

NOTES:
 1) ONLY MATES WITH KEY "A" RECEPTACLES.

| PRODUCT NUMBERING AND LENGTHS | | |
|-------------------------------|------------|-------|
| PART NUMBER | LENGTH "L" | |
| | M | FT |
| 2354-1100-10 | 1.00 | 3.28 |
| 2354-1100-20 | 2.00 | 6.56 |
| 2354-1100-30 | 3.00 | 9.84 |
| 2354-1100-60 | 6.00 | 19.68 |

| REV. | DESCRIPTION | APPRV | DATE |
|------|---------------------------------------|-------|-----------|
| 1 | ECN 2016-0031 PART NUMBER RECONFIGURE | AHR | 5/23/2016 |

| | | | | |
|-------------------------|---------------|------------------|---|---|
| DIMENSIONS ARE IN: | MM [INCH] | APPROVALS | | ANDERSON POWER PRODUCTS |
| UNLESS OTHERWISE STATED | | DRAWN | AHR 5/29/2015 | |
| TOLERANCES: | | CHECKED | RJL 7/9/2015 | |
| DECIMALS (INCH) | DECIMALS (MM) | ANGLES | | |
| .XX ± .02 | .X ± .5 | ± 2° | | TITLE SAF-D-GRID® SINGLE ENDED POWER CORD, 18 AWG 2354-1100 SERIES |
| SURFACE FINISH: | | | MFG APPRV | |
| MACHINED | 3.2µ [128µin] | ✓ | CHB 7/9/2015 | |
| MOLDED | 1.6µ [64µin] | ✓ | QC APPRV | |
| MATERIAL: SEE TABLE | | | ASF 7/9/2015 | SIZE B |
| FINISH: N/A | | | ENG APPRV | |
| | | | CLY 7/9/2015 | REV. 1 |
| | | | -CAD GENERATED DRAWING- DO NOT MANUALLY UPDATE DO NOT SCALE | |
| | | | SCALE | CADFILE 04363 |
| | | | NONE | SHEET 1 OF 1 |

8

7

6

5

4

3

2

1