


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ANDERSON POWER PRODUCTS. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF ANDERSON POWER PRODUCTS IS PROHIBITED.

Copyright 2015

ANDERSON POWER PRODUCTS RESERVES THE RIGHT TO ALTER PRODUCT TYPES, THEIR TECHNICAL DATA, DIMENSION, STYLE AND ACCESSORIES WITHOUT PRIOR NOTIFICATION.

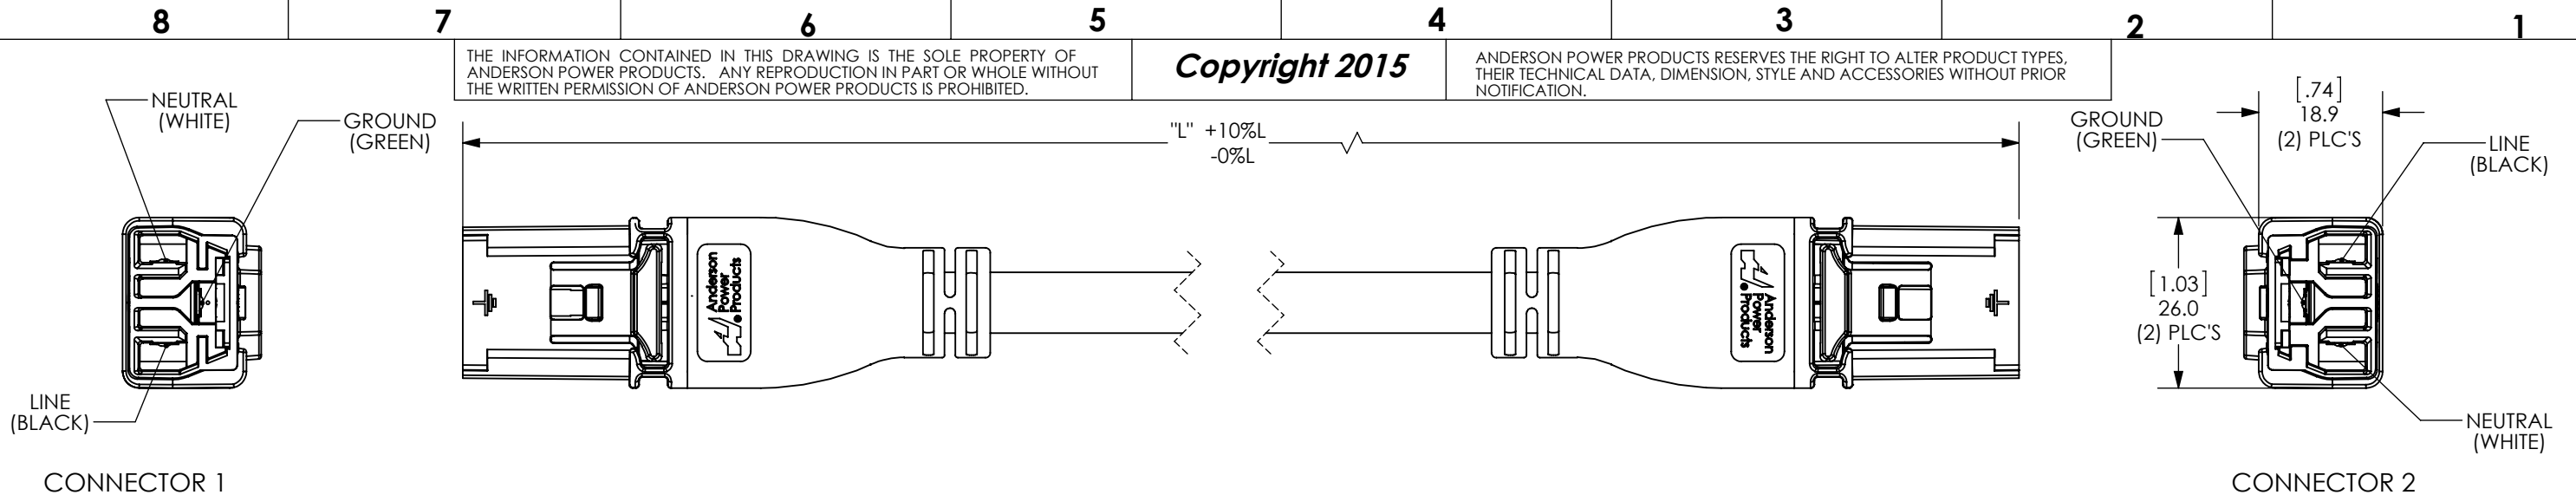

CONNECTOR 2		CABLE		CONNECTOR 2	
TYPE	SAF-D-GRID® 300 VOLT (3-6075P10)	TYPE	UL 62 LISTED SJT TYPE	TYPE	SAF-D-GRID® 300 VOLT (3-6075P20)
KEY CONFIGURATION	KEY "A"(SEE NOTE 1)	CONDUCTOR SIZE / QTY.	14 / 3	KEY CONFIGURATION	KEY "B"(SEE NOTE 2)
APPROVAL	cURus TO UL 1977, FILE# E26226	STRANDING	41 X 30AWG	APPROVAL	cURus TO UL 1977, FILE# E26226
CONTACTS	COPPER ALLOY, SILVER PLATED	FLAMMABILITY / TEMP.	VW-1 / 90°C	CONTACTS	COPPER ALLOY, SILVER PLATED
INNER MOLD HOUSING	POLYCARBONATE, GRAY. UL 94 V-0	VOLTAGE RATING	300V AC/DC	INNER MOLD HOUSING	POLYCARBONATE, BLACK. UL 94 V-0
OVERMOLD	PVC, BLACK. UL 94 V-2	JACKET	PVC, NOMINAL O.D. 9.3 [.37]	OVERMOLD	PVC, BLACK. UL 94 V-2
		JACKET COLOR	BLACK		

OVERALL RATINGS AND SPECIFICATIONS	
VOLTAGE	300V AC/DC
CURRENT	18A
MAXIMUM OPERATING TEMPERATURE	80°C
CERTIFICATION	INSPECTION
cURus TO UL 817, FILE # E343569	HI POT WIRE TO WIRE 2.5 kV / 3 SEC.
REACH COMPLIANT	POLARITY TESTED 100%
RoHS COMPLIANT	CONTINUITY TESTED 100%
	ELECTRICAL TESTING 100%
	VISUAL INSPECTION 100%

NOTES:
 1) ONLY MATES WITH KEY "A" RECEPTACLES.
 2) ONLY MATES WITH KEY "B" RECEPTACLES.

PRODUCT NUMBERING AND LENGTHS		
PART NUMBER	LENGTH "L"	
	M	FT
2352-1112-10	1.00	3.28
2352-1112-20	2.00	6.56
2352-1112-30	3.00	9.84
2352-1112-60	6.00	19.68

REV.	DESCRIPTION	APPRV	DATE
1	ECN 2016-0031 PART NUMBER RECONFIGURE	AHR	5/23/2016

DIMENSIONS ARE IN:	MM [INCH]	APPROVALS		 ANDERSON POWER PRODUCTS
UNLESS OTHERWISE STATED		DRAWN	AHR 8/28/2015	
TOLERANCES:		CHECKED	TWE 10/26/2015	
DECIMALS (INCH)	DECIMALS (MM)	ANGLES	MKTG APPRV	
.XX ±.02	.X ±.5	±2°	RJL 10/26/2015	
SURFACE FINISH:		QC APPRV	UFN 10/26/2015	
MACHINED	3.2µ [128µin]	ENG APPRV	CLY 10/26/2015	
MOLDED	1.6µ [64µin]			
MATERIAL: SEE TABLE		FINISH:	N/A	TITLE SAF-D-GRID® DOUBLE ENDED POWER CORD, 14 AWG 2352-1112 SERIES
		SIZE	B	DWG NO.
		SCALE	NONE	B02241S7
		CADFILE	04625	REV.
		SHEET	1 OF 1	1