


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ANDERSON POWER PRODUCTS. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF ANDERSON POWER PRODUCTS IS PROHIBITED.



Copyright 2015

ANDERSON POWER PRODUCTS RESERVES THE RIGHT TO ALTER PRODUCT TYPES, THEIR TECHNICAL DATA, DIMENSION, STYLE AND ACCESSORIES WITHOUT PRIOR NOTIFICATION.

E

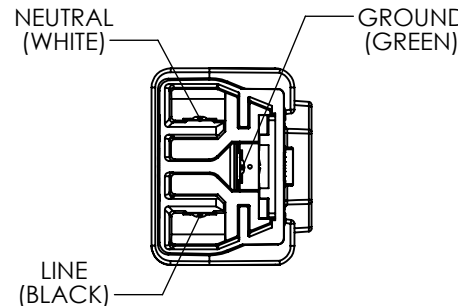

CONNECTOR 1

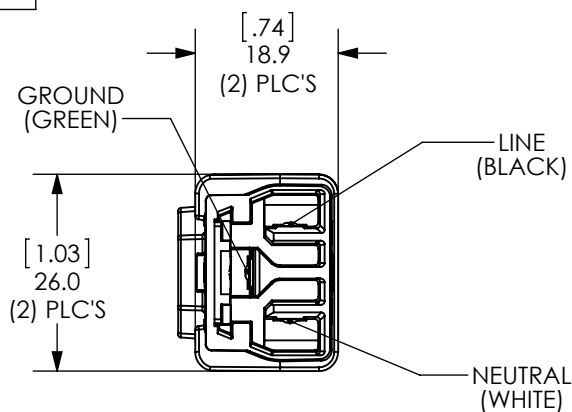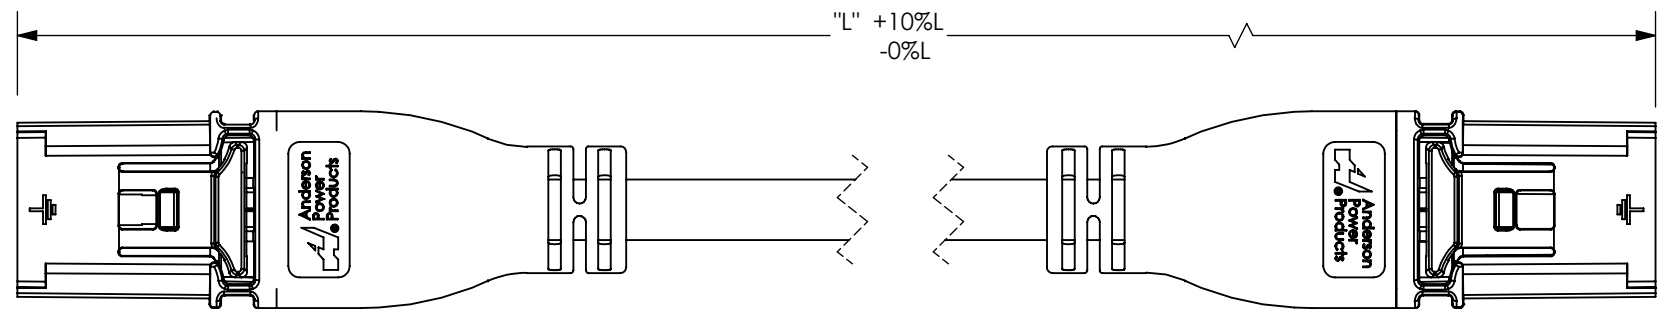

CONNECTOR 2

D

CONNECTOR 1		CABLE		CONNECTOR 2	
TYPE	SAF-D-GRID® 300 VOLT (3-6075P10)	TYPE	UL 62 LISTED SJT TYPE	TYPE	SAF-D-GRID® 300 VOLT (3-6075P20)
KEY CONFIGURATION	KEY "A"(SEE NOTE 1)	CONDUCTOR SIZE / QTY.	18 / 3	KEY CONFIGURATION	KEY "B"(SEE NOTE 2)
APPROVAL	cURus TO UL 1977, FILE# E26226	STRANDING	16 X 30AWG	APPROVAL	cURus TO UL 1977, FILE# E26226
CONTACTS	COPPER ALLOY, SILVER PLATED	FLAMMABILITY / TEMP.	VW-1 / 90°C	CONTACTS	COPPER ALLOY, SILVER PLATED
INNER MOLD HOUSING	POLYCARBONATE, GRAY. UL 94 V-0	VOLTAGE RATING	300V	INNER MOLD HOUSING	POLYCARBONATE, BLACK. UL 94 V-0
OVERMOLD	PVC, BLACK. UL 94 V-2	JACKET	PVC, O.D. 8.0 [.32]	OVERMOLD	PVC, BLACK. UL 94 V-2
		JACKET COLOR	BLACK		

C

B

- NOTES:
 1) ONLY MATES WITH KEY "A" RECEPTACLES.
 2) ONLY MATES WITH KEY "B" RECEPTACLES.

OVERALL RATINGS AND SPECIFICATIONS	
VOLTAGE	300V AC/DC
CURRENT	10A
MAXIMUM OPERATING TEMPERATURE	80°C
CERTIFICATION	
cURus TO UL 817, FILE # E343569	HI POT WIRE TO WIRE 2.5 kV / 3 SEC.
REACH COMPLIANT	POLARITY TESTED 100%
RoHS COMPLIANT	CONTINUITY TESTED 100%
	ELECTRICAL TESTING 100%
	VISUAL INSPECTION 100%

A

PRODUCT NUMBERING AND LENGTHS		
PART NUMBER	LENGTH "L"	
	M	FT
2354-1112-10	1.00	3.28
2354-1112-20	2.00	6.56
2354-1112-30	3.00	9.84
2354-1112-60	6.00	19.68

REV.	DESCRIPTION	APPRV	DATE
1	ECN 2016-0031 PART NUMBER RECONFIGURE	AHR	5/23/2016

DIMENSIONS ARE IN:	MM [INCH]	APPROVALS		 ANDERSON POWER PRODUCTS TITLE SAF-D-GRID® DOUBLE ENDED POWER CORD, 18 AWG 2354-1112 SERIES		
UNLESS OTHERWISE STATED		DRAWN	AHR 5/29/2015			
TOLERANCES:		CHECKED	RJL 7/9/2015			
DECIMALS (INCH)	DECIMALS (MM)	MFG APPRV	CHB 7/9/2015			
.XX ± .02	.X ± .5	QC APPRV	ASF 7/9/2015			
SURFACE FINISH:		ENG APPRV	CLY 7/9/2015	SIZE	DWG NO.	REV.
MACHINED	3.2µ [128µin]			B	B02241S4	1
MOLDED	1.6µ [64µin]					
MATERIAL: SEE TABLE				SCALE	CADFILE	SHEET
FINISH: N/A				NONE	04536	1 OF 1

8

7

6

5

4

3

2

1

E

D

C

B

A