



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ANDERSON POWER PRODUCTS. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF ANDERSON POWER PRODUCTS IS PROHIBITED.

Copyright 2016

ANDERSON POWER PRODUCTS RESERVES THE RIGHT TO ALTER PRODUCT TYPES, THEIR TECHNICAL DATA, DIMENSION, STYLE AND ACCESSORIES WITHOUT PRIOR NOTIFICATION.

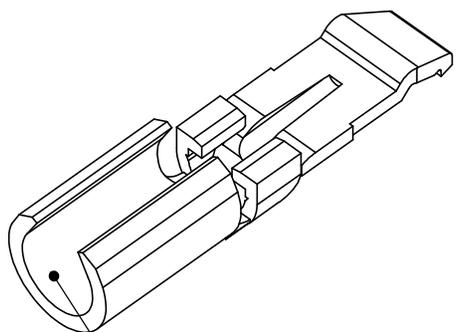


BARREL SIZED FOR #16-20 AWG WIRE




[3.6]
.14

[3.6]
.14

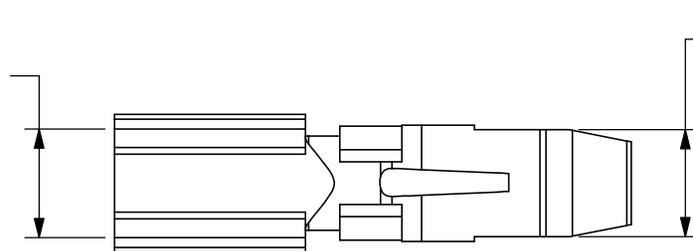

[17.2]
.68

[6.4]
.25

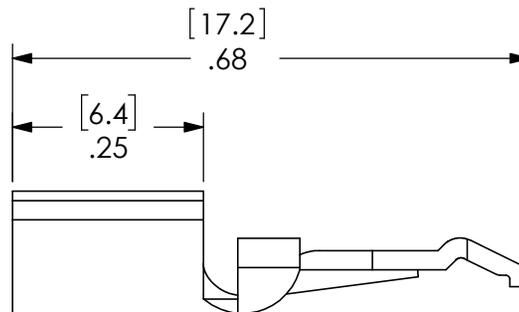

DIMENSIONS ARE IN:		INCH [MM]		APPROVALS		ANDERSON POWER PRODUCTS	
UNLESS OTHERWISE STATED				DRAWN	CMS	6/29/1999	TITLE CATALOG NUMBER 269G2 15 AMP HIGH DENTENT CONTACT FOR REEL TRYPE "F" CRIMP #16-20 WIRE
TOLERANCES:				CHECKED	DJD	6/30/1999	
DECIMALS (INCH)	DECIMALS (MM)	ANGLES		PM APPRV	CHB	6/30/1999	
.XX ± .02	.X ± .5	±2°		QC APPRV	RPO	6/30/1999	
SURFACE FINISH:				ENG APPRV	UFN	6/30/1999	SIZE A
MACHINED		128µin [3.2µ]		DWG NO.		113967S2	
MOLDED		64µin [1.6µ]		REV.		2	
MATERIAL: COPPER				-CAD GENERATED DRAWING- DO NOT MANUALLY UPDATE DO NOT SCALE		SCALE NONE	
FINISH: HOT TIN DIP				CADFILE		01062	
3rd ANGLE PROJECTION		SHEET		1 OF 1			

2	ECN 2016-0073	CPD	10/14/2016
REV.	DESCRIPTION OF CHANGES	APPROVED	DATE