

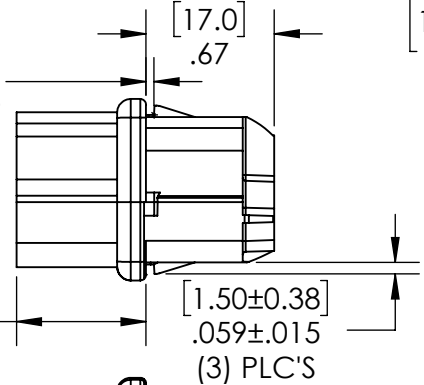

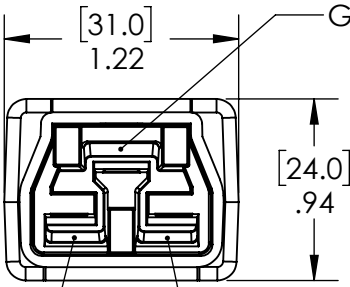



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ANDERSON POWER PRODUCTS. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF ANDERSON POWER PRODUCTS IS PROHIBITED.

**Copyright 2012**

ANDERSON POWER PRODUCTS RESERVES THE RIGHT TO ALTER PRODUCT TYPES, THEIR TECHNICAL DATA, DIMENSION, STYLE AND ACCESSORIES WITHOUT PRIOR NOTIFICATION.



PART ID  
LOCATED HERE  
SEE TABLE

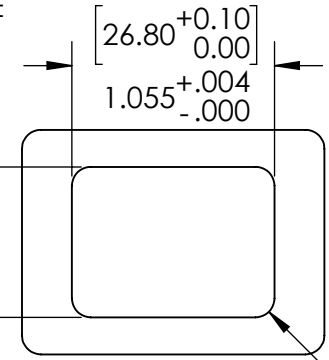

**RECOMMENDED  
PANEL CUT-OUT**

[2.5]  
R.10 MAX.  
TYP

NEGATIVE (-) POSITIVE (+)

**NOTES:**

1. HOUSING MATERIAL: HIGH TEMP. NYLON + 30%GF, UL 94 V-0, HALOGEN FREE
2. SPRING MATERIAL: STAINLESS STEEL
3. FOR USE WITH IEC320 C14 PANEL CUT-OUTS
4. ELECTRICAL RATING:  
20A, 600V NOT FOR CURRENT INTERRUPTION  
20A, 400V FOR CURRENT INTERRUPTION
5. TEMPERATURE RATING: 105°C

CAT. NO.	PANEL THICKNESS		DIM "A" <sup>+0.006[0.15]</sup> <sub>-.004[0.10]</sub>		PART ID
	INCH	MM	INCH	MM	
2006G1-NC	.031	0.80	.041	1.05	"0.8"
2006G2-NC	.047	1.20	.056	1.42	"1.2"
2006G3-NC	.039	1.00	.048	1.22	"1.0"
2006G4-NC	.063	1.60	.072	1.82	"1.6"
2006G5-NC	.079	2.00	.088	2.24	"2.0"
2006G6-NC	.098	2.50	.107	2.72	"2.5"

REV.	DESCRIPTION	APPRV	DATE
8	ECN 2017-0049 ADDED ELEC. AND TEMP. RATING NOTES	CPD	5/19/2017
7	ECRN-15571	CLY	2/21/2014
6	ECRN-15520	CLY	11/25/2013
5	ECRN-15441	CLY	7/22/2013
4	ECRN 15377	CLY	4/4/2013
3	ECRN 15276	CLY	11/30/2012

DIMENSIONS ARE IN: INCH [MM]		APPROVALS		ANDERSON POWER PRODUCTS	
UNLESS OTHERWISE STATED		DRAWN	CLY	TITLE	
TOLERANCES:		CHECKED	NTS	RECEPTACLE HOUSING WITHOUT CONTACTS, SAF-D-GRID® ULTRA SHORT, 2006 SERIES	
DECIMALS (INCH)	DECIMALS (MM)	MFG APPRV	CHB	SIZE	DWG NO.
.XX ± .02	.X ± .5	QC APPRV	UFN	A	115171S2
ANGLES ±2°		ENG APPRV	BD	SCALE	REV.
SURFACE FINISH:		6/11/2012		NONE	8
MACHINED 128µin [3.2µ]		-CAD GENERATED DRAWING- DO NOT MANUALLY UPDATE DO NOT SCALE		CADFILE	SHEET
MOLDED 64µin [1.6µ]				03742	1 OF 1
MATERIAL: SEE NOTES					
FINISH: N/A					

REVISIONS

